


MobileForceTM A770

The Ultimate Rugged Notebook

- Most rugged COTS product on the market
- Versatile multi-bay design
- Expandable PCI/ISA chassis
- MIL-STD 810F tested and certified (461E available)
- 10 hours continuous operation

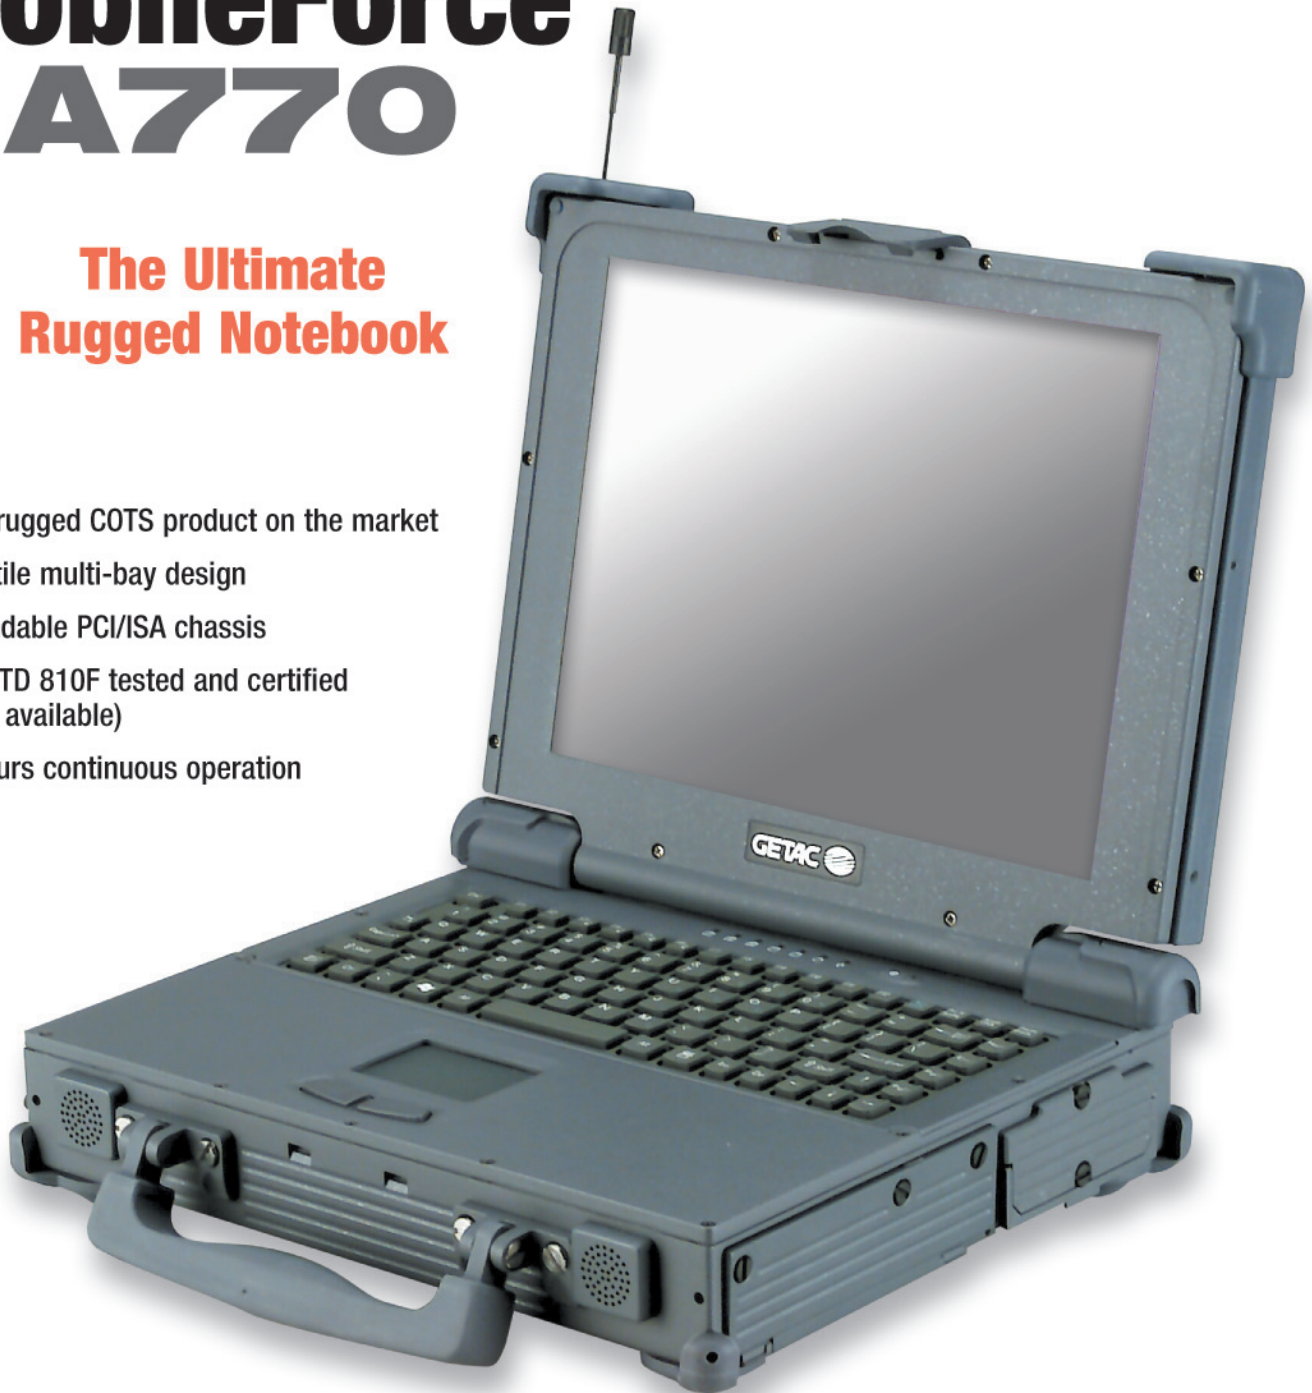

WWW.DURATECHUSA.COM

GETAC 
ruggedized mobile computing solutions

MobileForce™ A770 Specs

CPU

- Intel® Pentium® M Processor LV 738
 - Processor Speed 1.6GHz
 - 2MB L2 Cache
 - 400MHz FSB
- Optional 1.8GHz Pentium® M Processor 745

Memory

- Standard: 256MB DDR SODIMM
- Expandable to 2GB

Video Memory

- 855 GME integrated graphic controller with 64MB shared system memory

HDD

- 40 GB shock-mounted, removable HDD (Standard)
- 60GB / 80 / 100 GB (Optional)
- Flash hard drive (Optional)
- Low temperature HDD heater (Optional)

Keyboard

- Shower-proof and dust-proof rubber keyboard
- Optional LED back-light rubber keyboard

Pointing Device

- Touch-sensitive control pad with Microsoft Win Mouse function coexist
- Glove-use touch pad (Optional)
- Touchscreen LCD (Optional)

PCMCIA Card

- Type III x 1 or Type II x 2

Communication

- 10 / 100 Base-T LAN
- 56K, V90. modem
- 802. 11B/G wireless LAN (Optional)
- Wireless modem GSM/GPRS (Optional)
- Bluetooth (Optional)

Battery

- Primary – Li-Ion smart battery
- Optional 2nd and 3rd battery in Bay 1 / Bay 2

AC Adapter

- Universal AC input (100-240v, 50/60Hz, auto sensing / switching power supply)

Security

- Kensington lock slot

Dimensions

- 12.2"(W) x 10"(D) x 2.8"(H)

Weight

- 12.9 lbs.

Software

- Supports Windows 2000 / Windows XP

Warranty

- 3 year limited warranty, parts and labor

Features:

- Tested & Certified MIL-STD 810F
- Multi-bay expandability
- Die-Cast magnesium alloy casing
- Fan-less design
- Individually sealed ports
- Optional PCI/ISA expansion chassis
- Optional MIL-STD 461E



Rear Panel I/O Ports

- Serial port
- Parallel port (EPP/ECP)
- RJ-11 (modem)
- RJ-45 (Ethernet)
- VGA monitor port
- IEEE 1394 port
- USB 2.0 x 2
- DC input
- IrDA port
- Port replicator port
- Audio out / Mic-in ports

a Display

- 12.1" 1024 x 768 (XGA) transmissive TFT active matrix color LCD (Standard)
 - 12.1" Sunlight Readable upgrade – A-12SLR
 - 12.1" Touchscreen upgrade – A-12TS
- Optional 14.1" 1024 x 768 (XGA) transmissive TFT active matrix color LCD
 - 14.1" Sunlight Readable upgrade – A-14SLR

b Bay 1 Modules

Standard: Removable floppy disc drive

Optional:

- Removable 2nd HDD – A-2NDHDD
- Removable CD-ROM drive – A-MEDCDROM
- Removable DVD / CDRW drive – A-MEDCOMBO
- Removable DVDRW drive – A-MEDDVDRW
- Removable Bay 1 battery – A-2NDBATT

c Bay 2 Module Options

Choice of one of the following:

- 2nd PCMCIA card slot (2xType II or 1xType III) – A-XPCMCIA
- COM port module (RS-232, 422 or 485 module) – A-XRS232/422/485
- GPS module – A-XGPS
- GPRS / GSM module – A-XGPRS / GSM
- Ultra 320 SCSI module – A-XSCSI
- Bay 2 Li-Ion smart battery – A-3RDBATT
- Fixed FDD drive – A-XFDD
- Customized bay

Accessories:

- PCI expansion chassis – A-PCIEXP
- ISA expansion chassis – A-ISAEXP
- AC adapters – A-ACADA
- Main battery – A-MAINBATT
- 2nd battery in Bay 1 – A-2NDBATT
- 3rd battery in Bay 2 – A-3RDBATT
- Carry bag – A-BAG
- 12-32V vehicle adapter / charger – A-1232VDC
- 10-20V vehicle adapter – A-1020VDC
- External battery charger – A-BCHGR
- Vehicle mount – A-VEHMOUNT
- Vehicle dock – A-VEHDOCK

DuraTech USA Inc.

12792 Valley View Street Suite 214
Garden Grove, CA 92845

Phone: (714) 898-2171

Fax: (714) 898-2502

Email: sales@DuraTechUSA.com

www.DuraTechUSA.com